




SI 1082

NEW

Monobloc pump for air conditioners up to 10 kW




AIR CONDITIONING

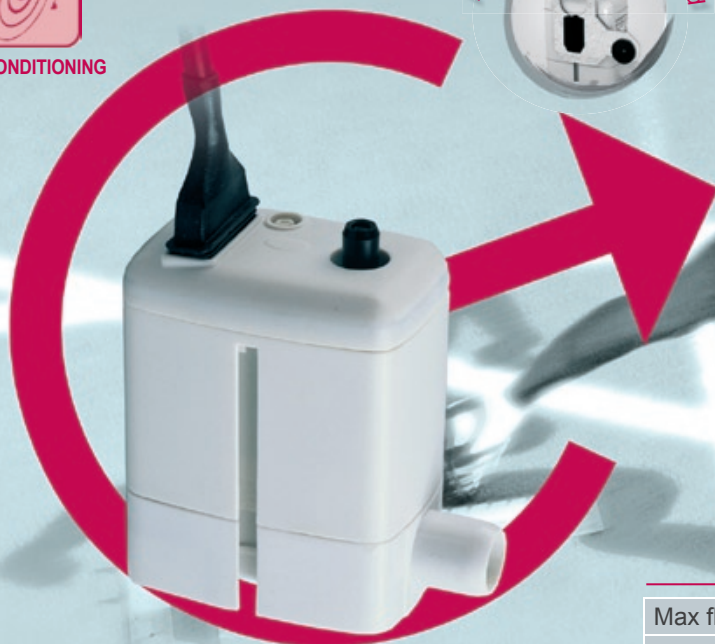

TECHNICAL CHARACTERISTICS

| | |
|-------------------------------|--------------------------|
| Max flow rate | 8 l/h |
| Max discharge head | 6 m |
| Mains supply | 10 W |
| | 230V~ 50/60Hz |
| Alarm contact | NC 8 A resistive - 250V |
| Thermal protection (overheat) | 90°C |
| Detection unit | integrated |
| Detection levels | On:18mm Off:12mm Al:21mm |
| Protection | IP 54 |
| Sound level | ≤ 28 dBA at 1 m |

| | | | |
|------------------|----|----|----|
| Dimensions in mm | L | W | H |
| Pump | 66 | 44 | 77 |

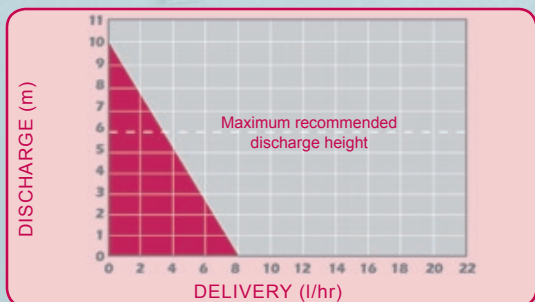

HIGH COMPETITIVE

Monobloc condensate pump integrating the float sensor, specifically designed for air conditioning units with limited internal space.

Low noise: ▶ ≤ 28 dBA • **Lowered installation inside the drain inlet:** ▶ less microbes, germs.

Low Maintenance Design: ▶ pump with 2.5mm ID section + duck valve to enable to pass small particules ▶ specifically designed condensate inlet - decanter for heavy & metallic parts - pins for long particules (hair, copper wires, ...) - no filter = no clogging

IP54 pump: ▶ the pump is protected against water drops (ex: condensation on the tubing)


APPLICATIONS

| WALL MOUNTED SYSTEMS | |
|----------------------|--|
| Fan-coil | |
| Floor split systems | |
| Wall split systems | |

| CEILING MOUNTED SYSTEMS | |
|-------------------------|--|
| Ceiling suspended units | |
| Ducted units | |


RECOMMENDED ACCESSORIES

ACC 00105 / ACC 00150 / ACC 00151



Clear tubing Ø 6 mm int.
ACC 00105 : 5 m in blister pack
ACC 00150 : in 50 m roll
ACC 00151 : reinforced 50 m roll

ACC 00205



6 self-sealing fittings for condensate removal.

ACC 00208



Rubber elbow 90° 15 x 15 mm.

ACC 00209



«S» type rubber hose 15 x 15 mm with a 4 mm offset to empty the drain pan.