



SI 2750

Mini condensate pump for air conditioners up to 10 kW




AIR CONDITIONING



TECHNICAL CHARACTERISTICS

Max flow rate	10 l/hr
Max suction head	2 m
Max discharge head	6 m
Mains supply	18 W
	230 V~ 50/60 Hz
Alarm contact	NO - NC 8 A resistive
Thermal protection (overheat)	90° C
Sound level at 1 m	≤ 32 dBA

Dimensions in mm	L	W	H
Pump unit	61	38	76
Detection unit	55	38	52

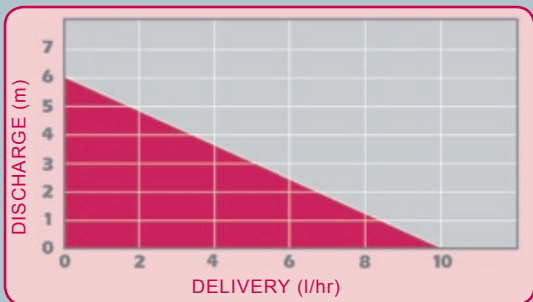

COMPETITIVE

Consisting of a pump unit & a remote detection unit, the SI 2750 pump was designed for air conditioning units with limited internal space.

APPLICATIONS

WALL MOUNTED SYSTEMS	
Wall split systems	
Floor split systems	
Fan-coils	

CEILING MOUNTED SYSTEMS	
Ceiling suspended units	
Ducted units	

RECOMMENDED ACCESSORIES

	ACC 0010 Special install kit containing the following accessories: 1 x ACC 00205*, 1 x ACC 00208, 1 x ACC 00209, 1 x ACC 00304		ACC 00105 / ACC 00150 / ACC 00151 Clear tubing Ø 6 mm int. ACC 00105 : 5 m in blister pack ACC 00150 : 50 m roll ACC 00151 : reinforcing 50 m roll		ACC 00205 6 self sealing fittings for condensate removal		ACC 00304 Vibration dampening mountings (pump not included)
--	---	--	---	--	--	--	---